

Installation Steps:




Components included with your safe:

1. Pluck Foam Pad - Qty 1
2. Thumb Nut - Qty 1
3. Steel Cable - Qty 1

Securing the Safe with the Cable:

- 1) Turn the lock to unlatch the door.
- 2) Wrap the Cable around a secure location, take the end of the Cable with the two shaft collars and thread them through the loop at the opposite end (**Image 2-A**). Pull the Cable through the loop, then insert one shaft collar into the hole in the side of the safe (**Image 2-B**)
- 3) Close the door and engage the lock. This will close the shaft collar within the Safe and secure the Cable (**Image 3**)
- 4) The Safe is now secured to the chosen location.

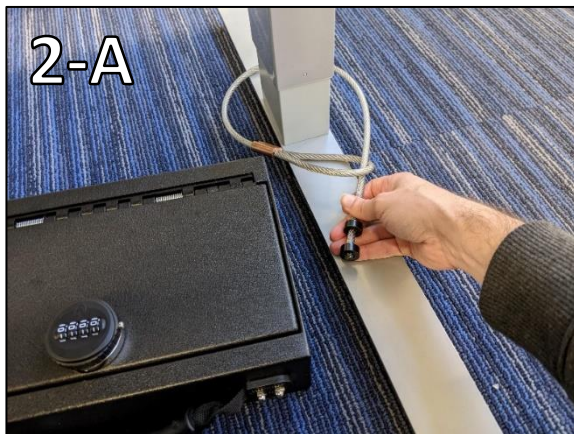

Combination Lock Reset Guides:

Installation Steps:

IMPORTANT: Make sure to set your combination **BEFORE** installing your safe

Before setting your combination, ensure safe door remains **OPEN** to prevent accidental lockout



⇒ [4 Digit Lock User Guide](#)



⇒ [3 Digit Lock User Guide](#)



⇒ [Elite 4-Digit Lock
User Guide](#)