


Installation Steps:

- 1) Set the combination on the lock according to the lock instructions.
- 2) Remove all contents from the center console including the pad at the bottom.
- 3) Remove the original console bolts with a socket wrench. **A1**
- 4) Ensure the USB cable is pulled inside the safe and is not pinched during installation.
- 5) Orient the safe so that the lock is towards the front of the vehicle. Place the safe inside the center console. **A2**
- 6) Plug the USB cable into the console USB port shown from driver perspective. **A3**
- 7) Use the longer bolts and washers included with the safe, hand threading each bolt into the console. **A4-A5**
- 8) Tighten each bolt with a socket wrench.
- 9) Place the provided foam pad in the bottom of the Console Vault.
- 10) The installation is now complete.

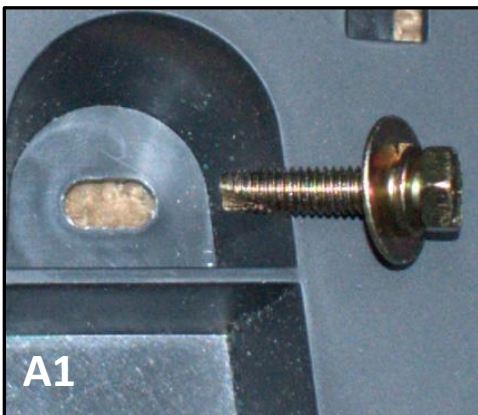

Combination Lock Reset Guides:

Installation Steps:

IMPORTANT: Make sure to set your combination **BEFORE** installing your safe

Before setting your combination, ensure safe door remains **OPEN** to prevent accidental lockout



⇒ [4 Digit Lock User Guide](#)



⇒ [3 Digit Lock User Guide](#)



⇒ [Elite 4-Digit Lock
User Guide](#)